
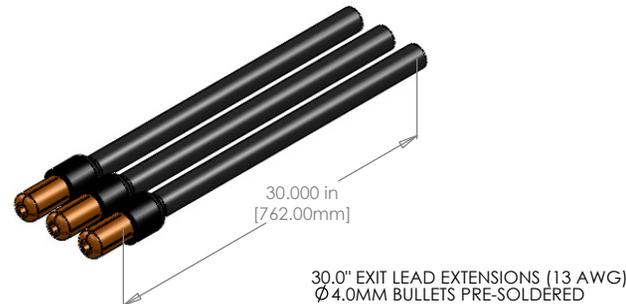
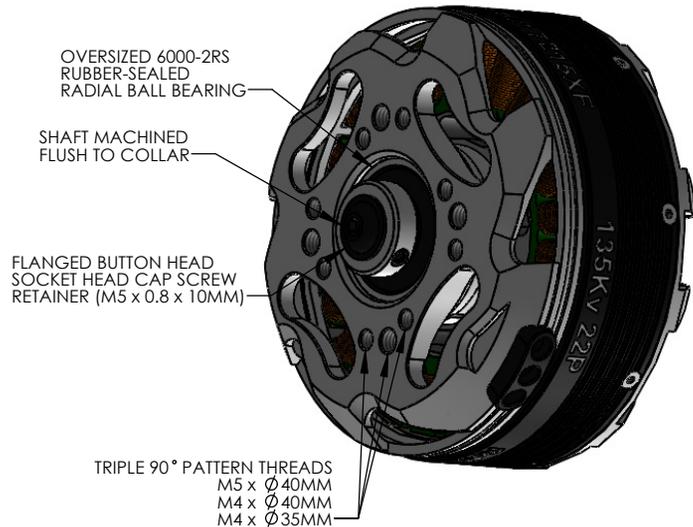
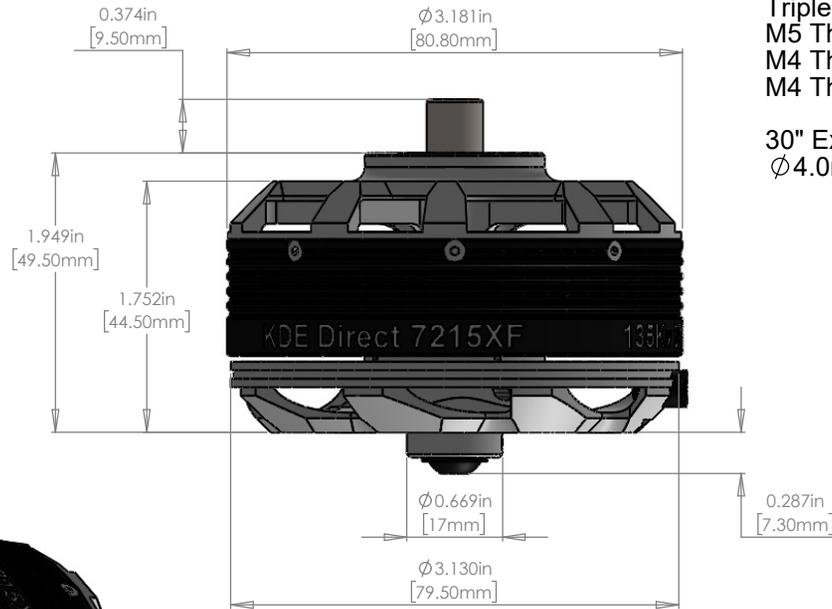


**KDE7215XF-135 KDE DIRECT UAS BRUSHLESS MOTOR
PRODUCTION RELEASE**

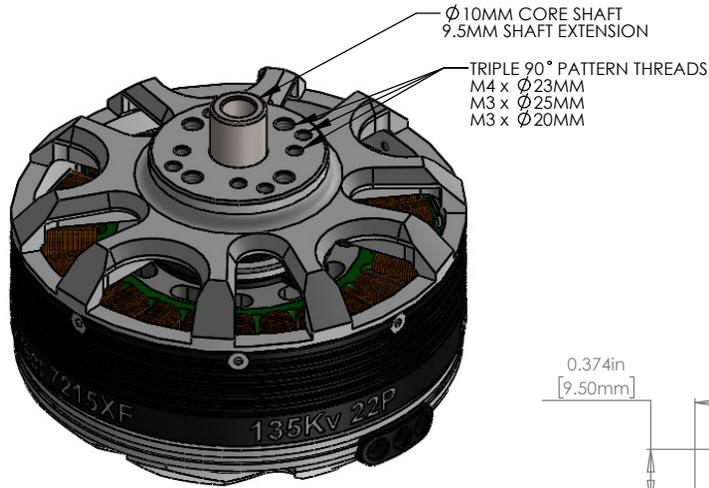

KDE DIRECT UAS BRUSHLESS MOTOR SPECS.

\varnothing 10mm Core Shaft
 \varnothing 10mm, 9.5mm Extended Length
 - Shaft Flush with Retaining Collar

6900-2RS Upper Bearing (\varnothing 10mm x \varnothing 22mm x 6mm)
 - Double Upper Bearings
 6000-2RS Lower Bearing (\varnothing 10mm x \varnothing 26mm x 8mm)
 - All Bearings Dual Rubber-Sealed (2RS)

Triple 90° Pattern Threads:
 M4 Threads x \varnothing 23mm Spacing
 M3 Threads x \varnothing 25mm Spacing
 M3 Threads x \varnothing 20mm Spacing

Triple 90° Pattern Threads:
 M5 Threads x \varnothing 40mm Spacing
 M4 Threads x \varnothing 40mm Spacing
 M4 Threads x \varnothing 35mm Spacing

30" Exit Lead Extensions (13 AWG)
 \varnothing 4.0mm 24k Bullets, Pre-Soldered and Shrink Wrap



www.KDEDirect.com
KDE7215XF-135